

EMC Test Report

Report No. : 1811C50127012601

Applicant : Shenzhen Lithtech Energy Co., LTD

Address : 14F,Block D, Central Avenue, Baoyuan Road,
Xixiang Sub-district, Bao'an District, Shenzhen
City, Guangdong Province, China

Product Name : Rechargeable Li-ion Battery

Report Date : 2025-05-26

Shenzhen Anbotek Compliance Laboratory Limited



Contents

1. General Information	4
1.1. Client Information	4
1.2. Description of Device (EUT)	4
1.3. Auxiliary Equipment Used During Test.....	4
1.4. Description of Test Modes.....	5
1.5. Measurement Uncertainty	5
1.6. Test Summary	6
1.7. Description of Test Facility	7
1.8. Disclaimer.....	7
1.9. EMS Performance Criteria	8
1.10. Test Equipment List.....	9
2. Radiation disturbance (30MHz-1GHz).....	10
2.1. EUT Operation	10
2.2. Test Setup	10
2.3. Test Data	11
3. Electrostatic discharge	15
3.1. EUT Operation	15
3.2. Test Setup	15
3.3. Test Data	16
4. Radio-frequency electromagnetic field	17
4.1. EUT Operation	17
4.2. Test Setup	17
4.3. Test Data	18
APPENDIX I -- TEST SETUP PHOTOGRAPH	19
APPENDIX II -- Photo documentation	21

TEST REPORT

Applicant : Shenzhen Lithtech Energy Co., LTD
Manufacturer : Dongguan Lithtech Technology Co., LTD
Product Name : Rechargeable Li-ion Battery
Model No. : TB8500X
Trade Mark : N/A

Rating(s) :
Nominal Voltage: 51.2V
Rated Capacity: 314Ah
Rated Energy: 16.076kWh
Max.Charge Voltage: 58.4V
Max.Charge Current: 200A
Max.Discharge Current: 200A

Test Standard(s) : **EN IEC 61000-6-3:2021**
EN IEC 61000-6-1:2019

The device described above is tested by Shenzhen Anbotek Compliance Laboratory Limited to determine the maximum emission levels emanating from the device and the severe levels of the device can endure and its performance criterion. The measurement results are contained in this test report and Shenzhen Anbotek Compliance Laboratory Limited is assumed full of responsibility for the accuracy and completeness of these measurements. Also, this report shows that the EUT (Equipment Under Test) is technically compliant with above listed standard(s) requirements. This report applies to above tested sample only and shall not be reproduced in part without written approval of Shenzhen Anbotek Compliance Laboratory Limited.

Date of Receipt: 2025-05-16

Date of Test: 2025-05-16 to 2025-05-22

Prepared By:



(Yee Huang)

Approved & Authorized Signer:



(KingKong Jin)

1. General Information

1.1. Client Information

Applicant	:	Shenzhen Lithtech Energy Co., LTD
Address	:	14F,Block D, Central Avenue, Baoyuan Road, Xixiang Sub-district, Bao'an District, Shenzhen City, Guangdong Province, China
Manufacturer	:	Dongguan Lithtech Technology Co., LTD
Address	:	5-6F, Building 2, Min'gang High-tech Industrial Park, No. 96 Qingbin East Road, Qingxi Town, Dongguan City, Guangdong Province, China
Factory	:	Dongguan Lithtech Technology Co., LTD
Address	:	5-6F, Building 2, Min'gang High-tech Industrial Park, No. 96 Qingbin East Road, Qingxi Town, Dongguan City, Guangdong Province, China

1.2. Description of Device (EUT)

Product Name	:	Rechargeable Li-ion Battery
Model No.	:	TB8500X
Trade Mark	:	N/A
Test Power Supply	:	DC 58.4V / DC 51.2V
Test Sample No.	:	1-1-1
Adapter	:	N/A
Remark: (1) For a more detailed features description, please refer to the manufacturer's specifications or the User's Manual.		

1.3. Auxiliary Equipment Used During Test

Title	Manufacturer	Model No.	Serial No.
/	/	/	/


1.4. Description of Test Modes

Pretest Modes	Descriptions
TM1	Charging mode
TM2	Discharging mode

For Mode 1 Block Diagram of Test Setup



For Mode 2 Block Diagram of Test Setup



1.5. Measurement Uncertainty

Parameter	Uncertainty
Radiated emissions (30MHz~1000MHz)	Horizontal: 4.44dB; Vertical: 4.82dB
The measurement uncertainty and decision risk evaluated according to AB/WI-RF-F-032. This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.	

1.6. Test Summary

Test Items	Test Modes	Status
Radiation disturbance (30MHz-1GHz)	Mode1,2	P
Electrostatic discharge	Mode1,2	P
Radio-frequency electromagnetic field	Mode1,2	P
Note: P: Pass N: N/A, not applicable		

1.7. Description of Test Facility

The test facility is recognized, certified, or accredited by the following organizations:

FCC-Registration No.:279531

Shenzhen Anbotek Compliance Laboratory Limited, EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in our files. Registration No. 279531.

ISED-Registration No.: 8058A

Shenzhen Anbotek Compliance Laboratory Limited, EMC Laboratory has been registered and fully described in a report filed with the (ISED) Innovation, Science and Economic Development Canada. The acceptance letter from the ISED is maintained in our files. Registration 8058A.

Test Location

Shenzhen Anbotek Compliance Laboratory Limited.
Sogood Industrial Zone Laboratory & 1/F. of Building D, Sogood Science and Technology Park, Sanwei Community, Hangcheng Subdistrict, Bao'an District, Shenzhen, Guangdong, China.

1.8. Disclaimer

1. The test report is invalid if not marked with the signatures of the persons responsible for preparing and approving the test report.
2. The test report is invalid if there is any evidence and/or falsification.
3. The results documented in this report apply only to the tested sample, under the conditions and modes of operation as described herein.
4. This document may not be altered or revised in any way unless done so by Anbotek and all revisions are duly noted in the revisions section.
5. Content of the test report, in part or in full, cannot be used for publicity and/or promotional purposes without prior written approval from the laboratory.
6. The authenticity of the information provided by the customer is the responsibility of the customer and the laboratory is not responsible for its authenticity.
7. The data in this report will be synchronized with the corresponding national market supervision and management departments and cross-border e-commerce platforms as required by regulatory agencies.

The laboratory is only responsible for the data released by the laboratory, except for the part provided by the applicant.

1.9. EMS Performance Criteria

Performance criteria A

The EUT shall continue to operate as intended during and after the test. No degradation of performance or loss of function is allowed below a performance level specified by the manufacturer, when the EUT is used as intended. If the performance level is not specified by the manufacturer, this may be derived from the product description and documentation and what the user may reasonably expect from the equipment if used as intended.

Performance criteria B

The EUT shall continue to operate as intended after the test. No degradation of performance or loss of function is allowed below a performance level specified by the manufacturer, when the EUT is used as intended. The performance level may be replaced by a permissible loss of performance. However, during the test degradation of performance is allowed but no change of actual operating state or stored data is allowed. If the minimum performance level or the permissible performance loss is not specified by the manufacturer, either of these may be derived from the product description and documentation and what the user may reasonably expect from the equipment if used as intended.

Performance criteria C

Temporary loss of function is allowed during the test, provided the function is self-recoverable or can be restored by the operation of the controls.



1.10. Test Equipment List

Radiation disturbance (30MHz-1GHz)						
Item	Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal.Due Date
1	Pre-amplifier	Emtrace	RP01A	00517	2025-01-14	2026-01-13
2	Bilog Broadband Antenna	Schwarzbeck	VULB9163	01471	2023-02-25	2026-02-24
3	Software Name EZ-EMC	Farad Technology	ANB-03A	N/A	/	/
4	EMI Test Receiver(RE3#)	Rohde & Schwarz	ESPI3	101604	2025-01-13	2026-01-12

Electrostatic discharge						
Item	Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal.Due Date
1	ESD Simulators	emtest	ESD NX30.1	11936	2025-03-03	2026-03-02

Radio-frequency electromagnetic field						
Item	Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal.Due Date
1	Signal Generator	Agilent	N5181A	MY50143107	2025-01-13	2026-01-12
2	Power Meter	Agilent	E4417A	MY45101384	2025-01-13	2026-01-12
3	Amplifier	Micotop	MPA-80-1000-600	MPA2110318	2025-01-13	2026-01-12
4	Amplifier	Micotop	MPA-1000-6000-100	MPA2110327	2025-01-13	2026-01-12
5	Log.-Per.-Antenna	Schwarzbeck	VULP 9118E	01012	/	/
6	Microwave Log.-Per. Antenna	Schwarzbeck	STLP 9149	00788	/	/
7	Power Sensor	KEYSIGHT	E9323A	US40410647	2025-01-13	2026-01-12
8	Power Sensor	KEYSIGHT	E9323A	MY53100007	2025-01-13	2026-01-12
9	Electric field Probe	Narda S.T.S /PMM	EP 601	811ZX10351	2025-02-22	2026-02-21
10	Software	EMtrace	EM 3	/	/	/


2. Radiation disturbance (30MHz-1GHz)

Test Requirement:	Table 3		
Test Limit:	Frequency range	Limits at 10m	Limits at 3m
	30 MHz to 230 MHz	30 dB(uV/m) quasi-peak	40 dB(uV/m) quasi-peak
	230 MHz to 1 000 MHz	37 dB(uV/m) quasi-peak	47 dB(uV/m) quasi-peak
	At transitional frequencies the lower limit applies.		
Test Method:	EN IEC 61000-6-3:2021		
Procedure:	An initial pre-scan was performed in the chamber using the spectrum analyser in peak detection mode. Quasi-peak measurements were conducted based on the peak sweep graph. The EUT was measured by BiConiLog antenna with 2 orthogonal polarities. Level=Read Level + Antenna Factor + Cable Loss - Preamplifier Factor		

2.1. EUT Operation


Operating Environment:	
Test mode:	1: TM1: Charging mode 2: TM2: Discharging mode

2.2. Test Setup

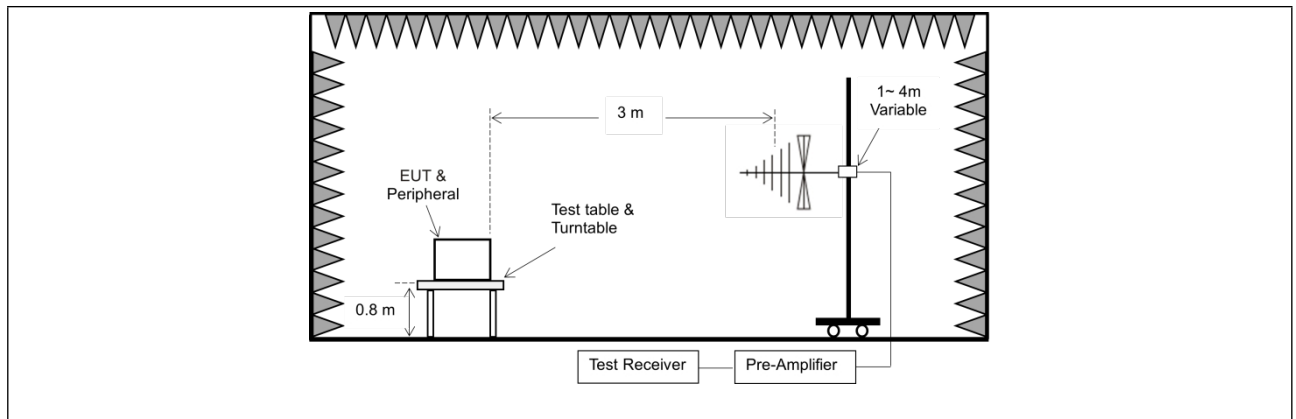


2.3. Test Data


Temperature:	23.5 °C	Humidity:	52 %	Atmospheric Pressure:	101 kPa
--------------	---------	-----------	------	-----------------------	---------

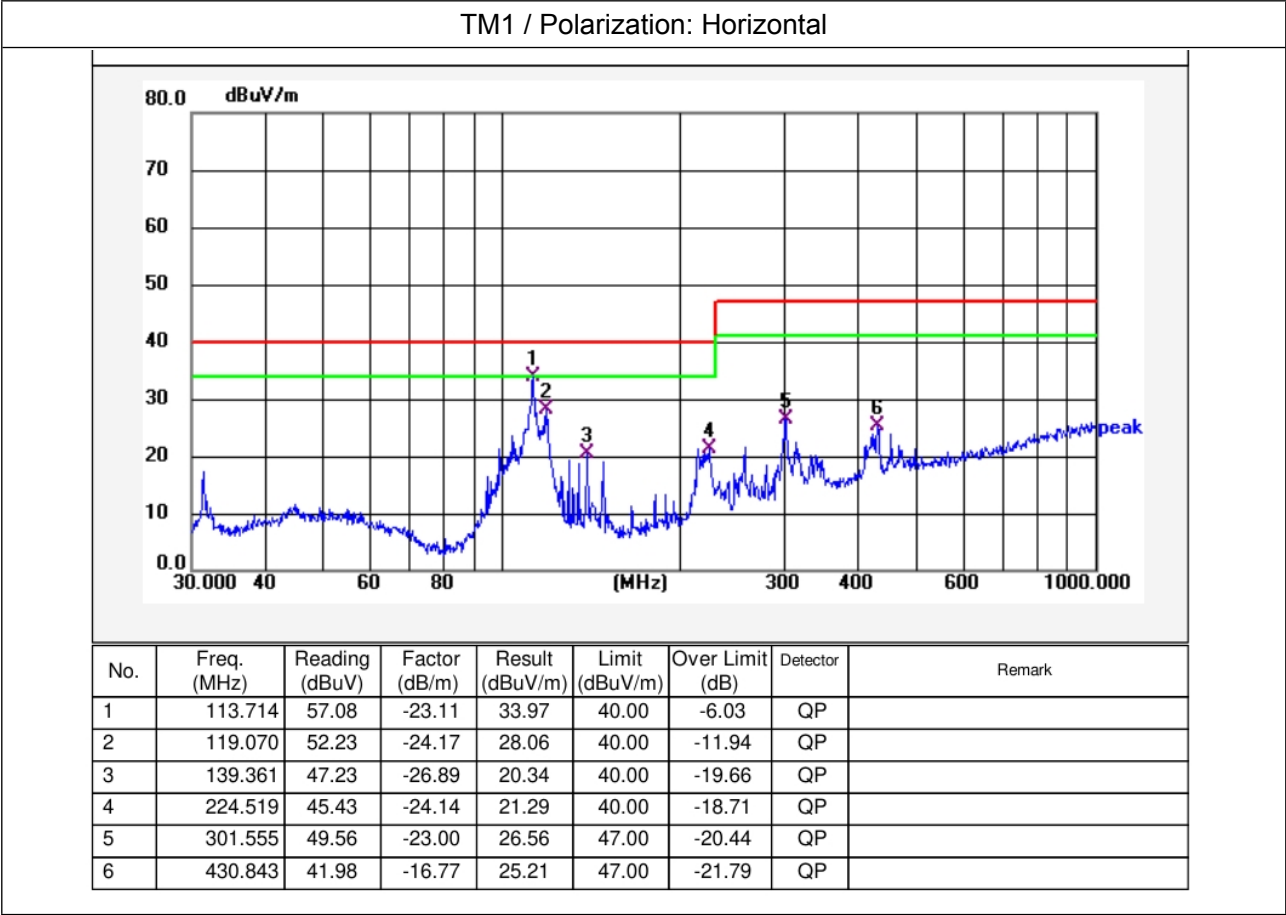


Temperature:	23.5 °C	Humidity:	52 %	Atmospheric Pressure:	101 kPa
--------------	---------	-----------	------	-----------------------	---------

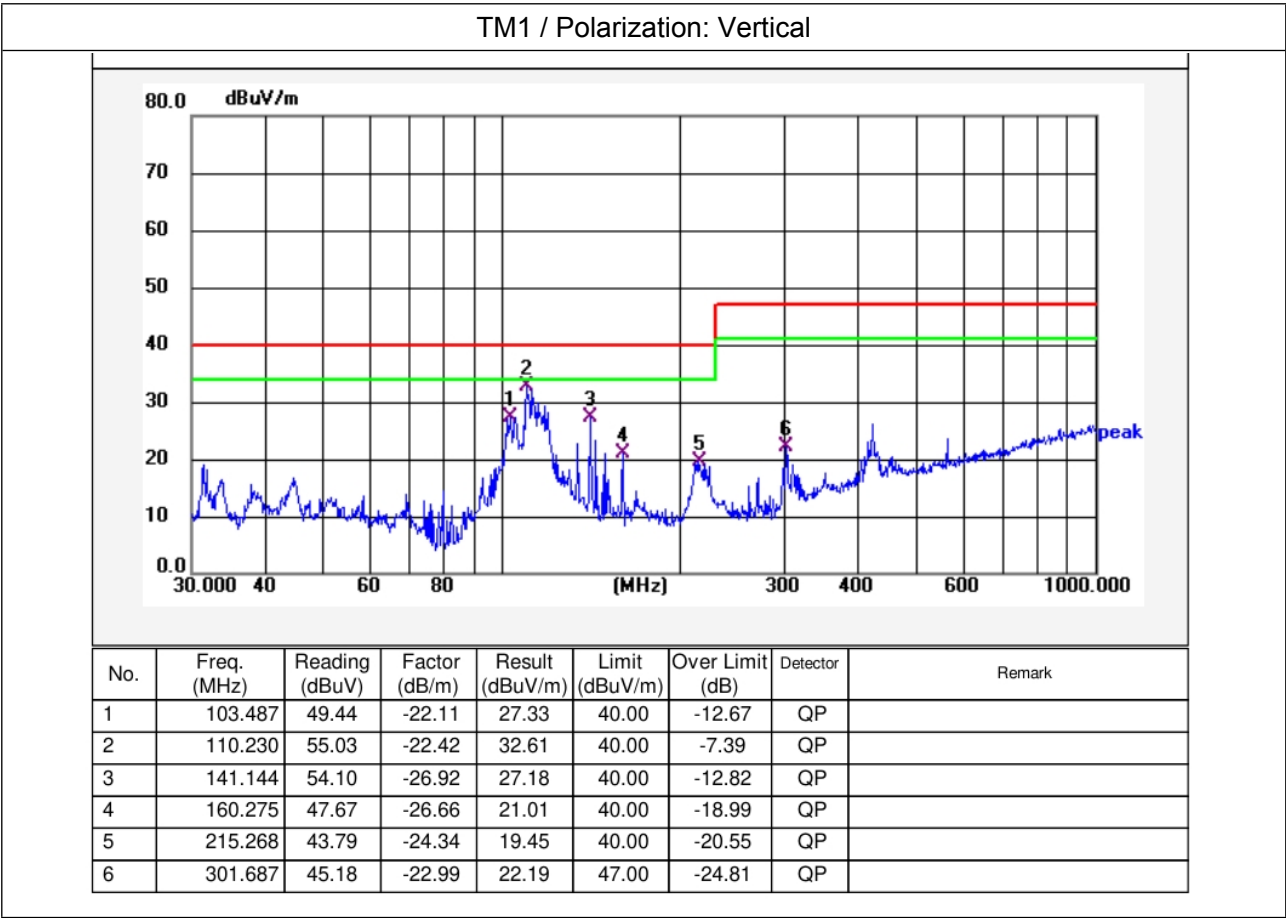

Temperature:	23.5 °C	Humidity:	52 %	Atmospheric Pressure:	101 kPa
--------------	---------	-----------	------	-----------------------	---------

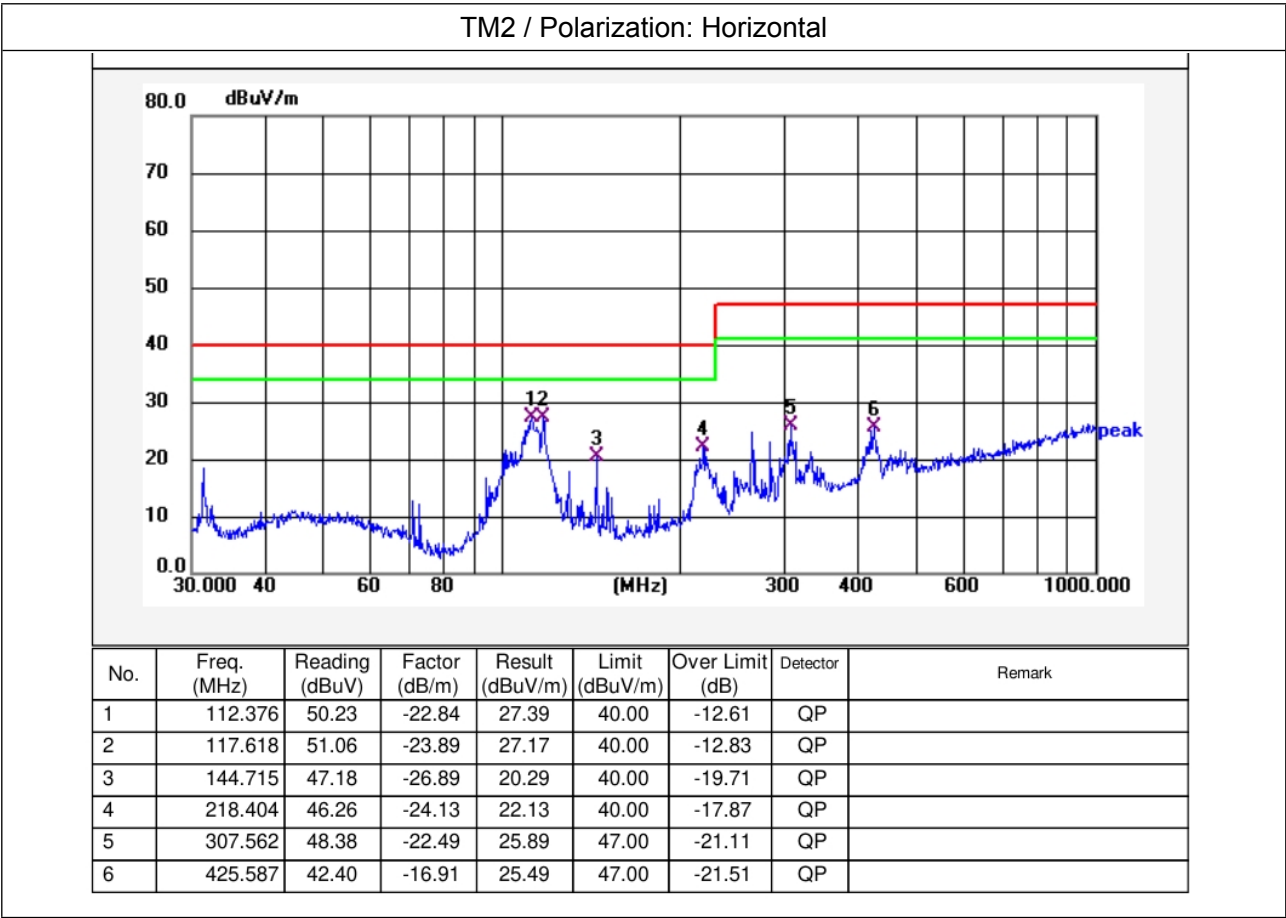

Temperature:	23.5 °C	Humidity:	52 %	Atmospheric Pressure:	101 kPa
--------------	---------	-----------	------	-----------------------	---------

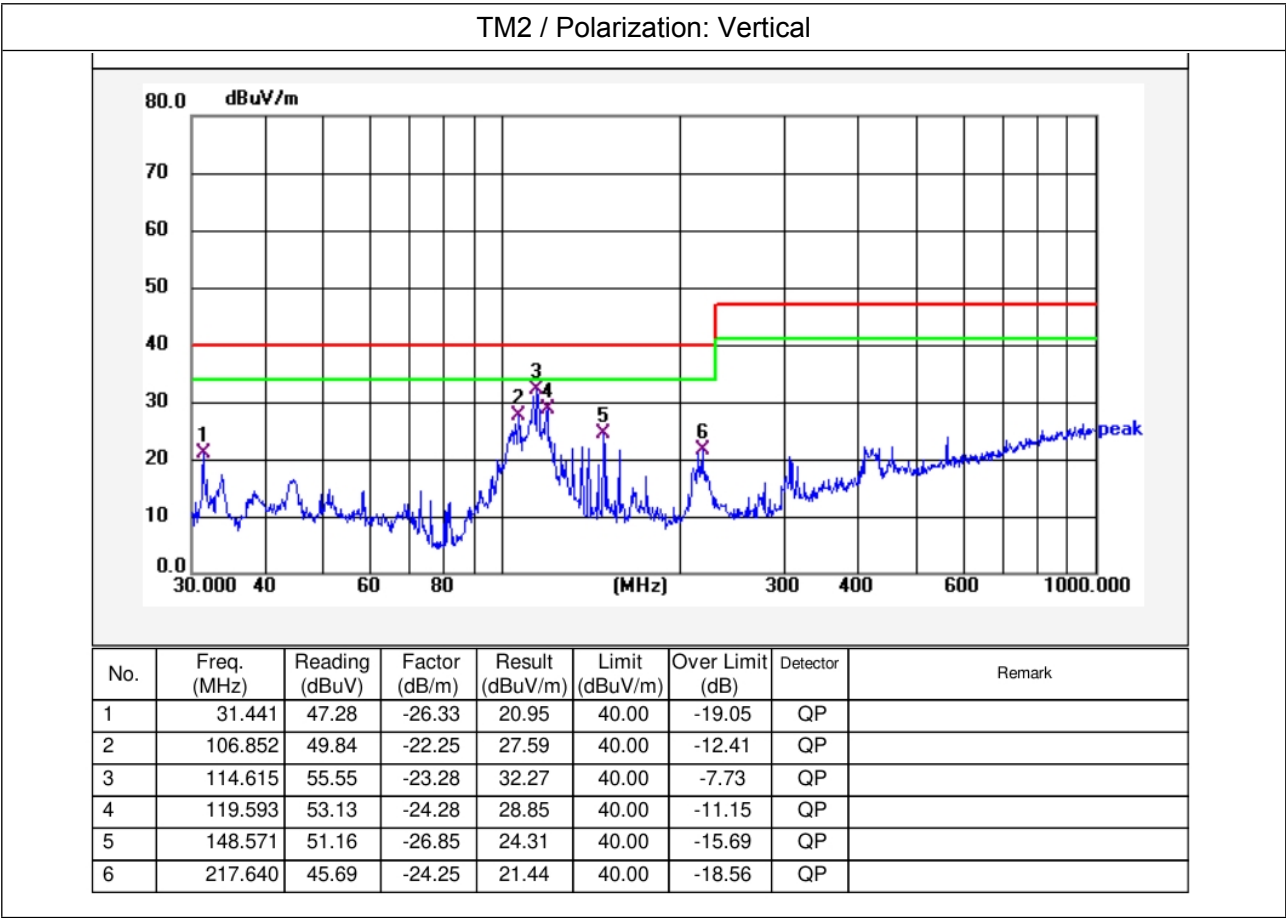

3.3. Test Data

Temperature:	24.8 °C	Humidity:	49 %	Atmospheric Pressure:	101 kPa
--------------	---------	-----------	------	-----------------------	---------

Discharge type	Volt (kV)	Polarity	Test Point	Result/ Observations
Air discharge	8	+	1	A
Air discharge	8	-	1	A
Contact discharge	4	+	2	A
Contact discharge	4	-	2	A
Horizontal Coupling	4	+	3	A
Horizontal Coupling	4	-	3	A
Vertical Coupling	4	+	3	A
Vertical Coupling	4	-	3	A

Test Point: 1. All insulated enclosure and seams.

2. All accessible metal parts of the enclosure.

3. All side.

A: No degradation in the performance of the EUT was observed.


4. Radio-frequency electromagnetic field

Test Requirement:	Table 1.2 & 1.3
Test Method:	EN IEC 61000-6-1:2019
Procedure:	Antenna Polarisation: Vertical and Horizontal Modulation: 1kHz,80% Amp. Mod,1% increment Frequency Range: 80MHz to 1GHz, 1.4GHz to 6GHz
Performance Criteria:	A

4.1. EUT Operation

Operating Environment:	
Test mode:	1: TM1: Charging mode 2: TM2: Discharging mode

4.2. Test Setup

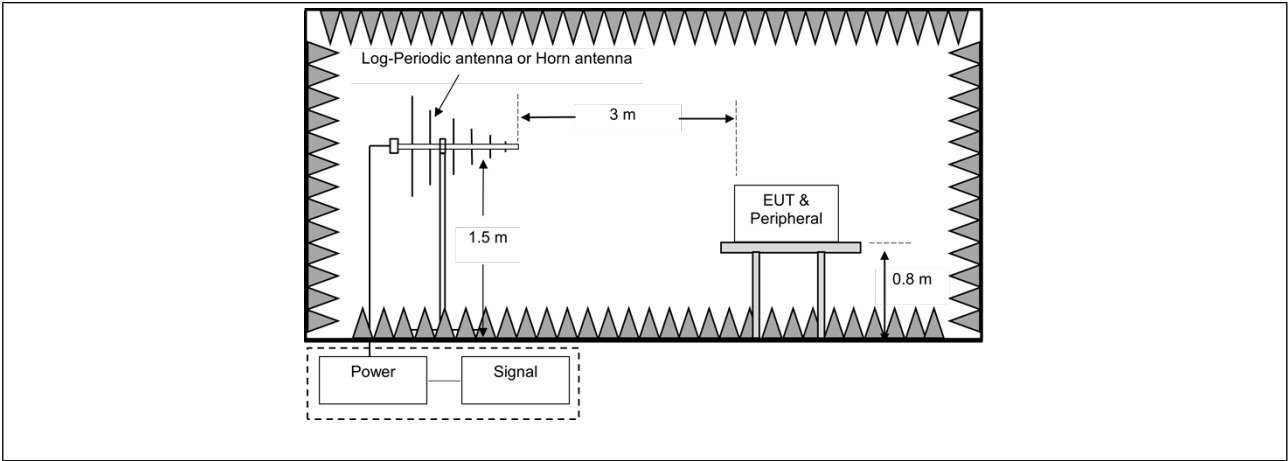

4.3. Test Data

Temperature:	24.8 °C	Humidity:	49 %	Atmospheric Pressure:	101 kPa
--------------	---------	-----------	------	-----------------------	---------

Frequency	Field Strength (V/m)	EUT face	Dwell time	Result/ Observations
80MHz-1GHz	3	Front	2s	A
80MHz-1GHz	3	Back	2s	A
80MHz-1GHz	3	Left	2s	A
80MHz-1GHz	3	Right	2s	A
80MHz-1GHz	3	Top	2s	A
80MHz-1GHz	3	Bottom	2s	A
1.4GHz-6GHz	3	Front	2s	A
1.4GHz-6GHz	3	Back	2s	A
1.4GHz-6GHz	3	Left	2s	A
1.4GHz-6GHz	3	Right	2s	A
1.4GHz-6GHz	3	Top	2s	A
1.4GHz-6GHz	3	Bottom	2s	A


A: No degradation in the performance of the EUT was observed.

APPENDIX I -- TEST SETUP PHOTOGRAPH


Radiation disturbance (30MHz-1GHz)



Electrostatic discharge

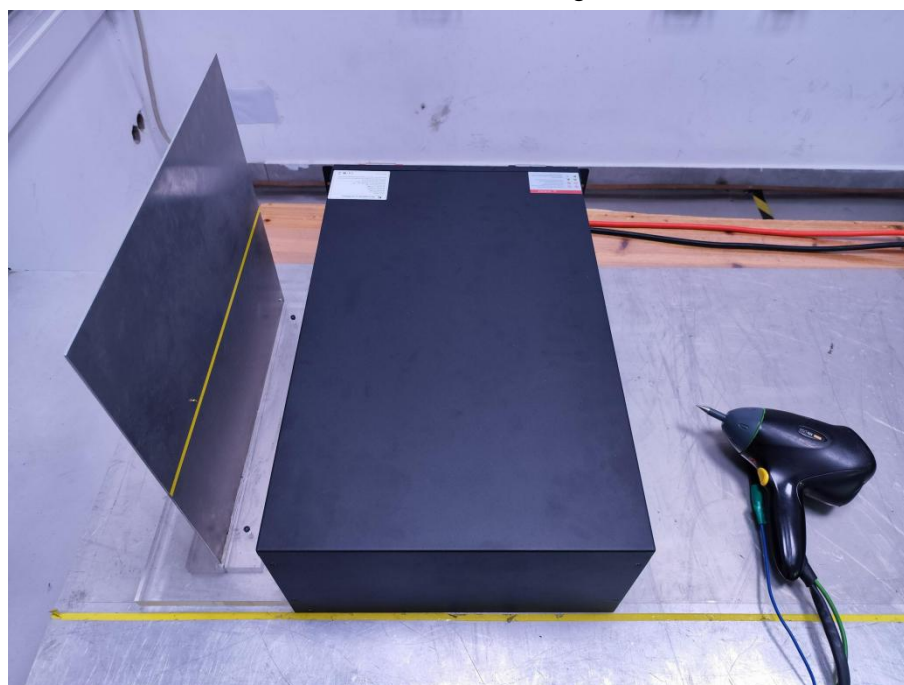


Radio-frequency electromagnetic field

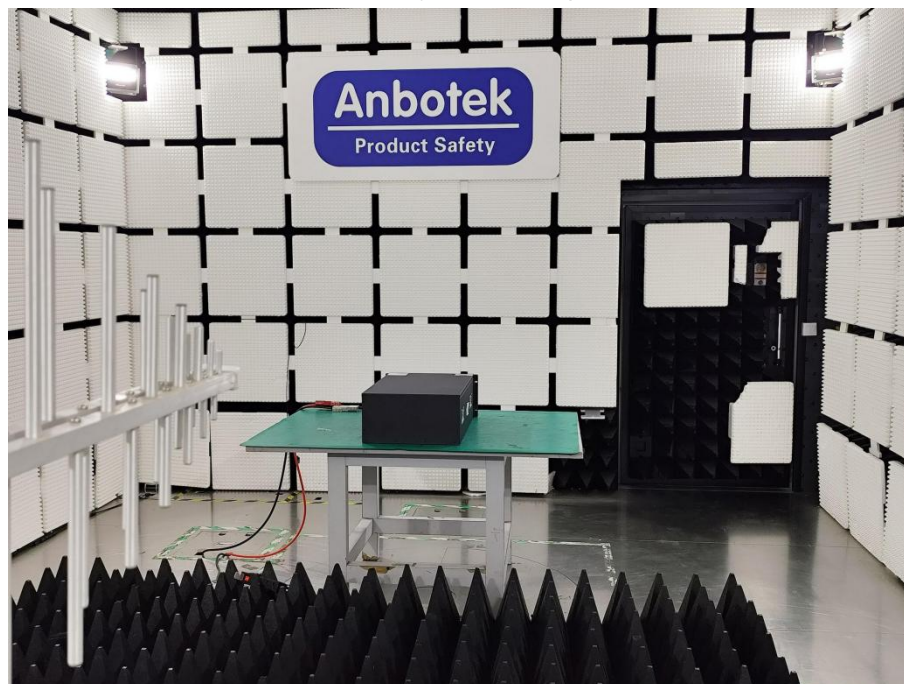


Shenzhen Anbotek Compliance Laboratory Limited

Address: Sogood Industrial Zone Laboratory & 1/F. of Building D, Sogood Science and Technology Park,
Sanwei Community, Hangcheng Subdistrict, Bao'an District, Shenzhen, Guangdong, China
Tel:(86)0755-26066440 Email:service@anbotek.com

 Hotline
400-003-0500
www.anbotek.com


APPENDIX II -- Photo documentation



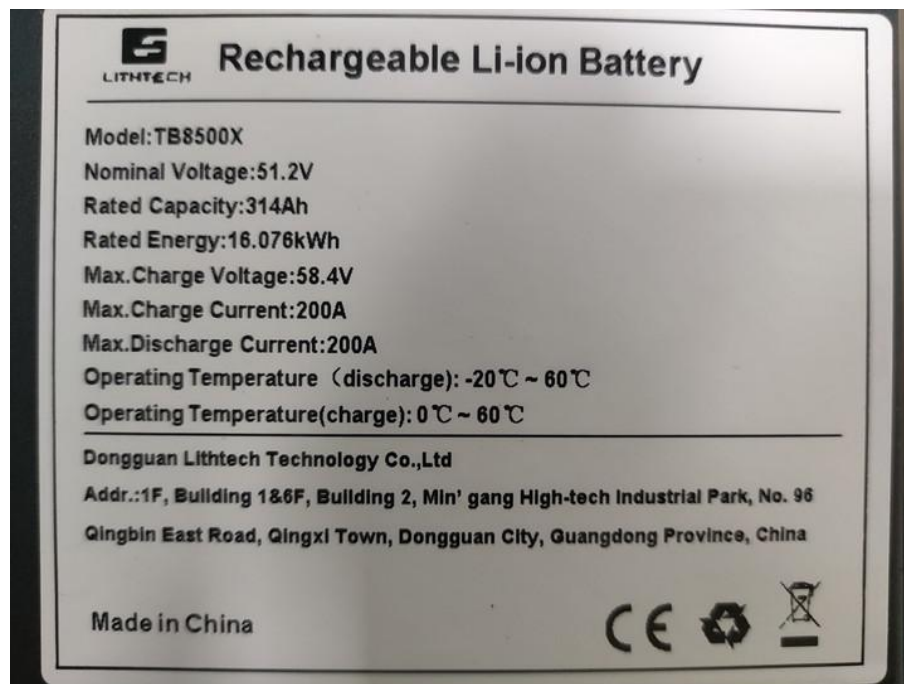

Shenzhen Anbotek Compliance Laboratory Limited

Address: Sogood Industrial Zone Laboratory & 1/F. of Building D, Sogood Science and Technology Park,
Sanwei Community, Hangcheng Subdistrict, Bao'an District, Shenzhen, Guangdong, China
Tel: (86) 0755-26066440 Email: service@anbotek.com

 Hotline
400-003-0500
www.anbotek.com

CE Label

1. The CE conformity marking must consist of the initials 'CE' taking the following form:
If the CE marking is reduced or enlarged, the proportions given in the above graduated drawing must be respected.
2. The CE marking must have a height of at least 5 mm except where this is not possible on account of the nature of the apparatus.
3. The CE marking must be affixed to the product or to its data plate. Additionally it must be affixed to the packaging, if any, and to the accompanying documents.
4. The CE marking must be affixed visibly, legibly and indelibly.
It must have the same height as the initials 'CE'.

----- End of Report -----

